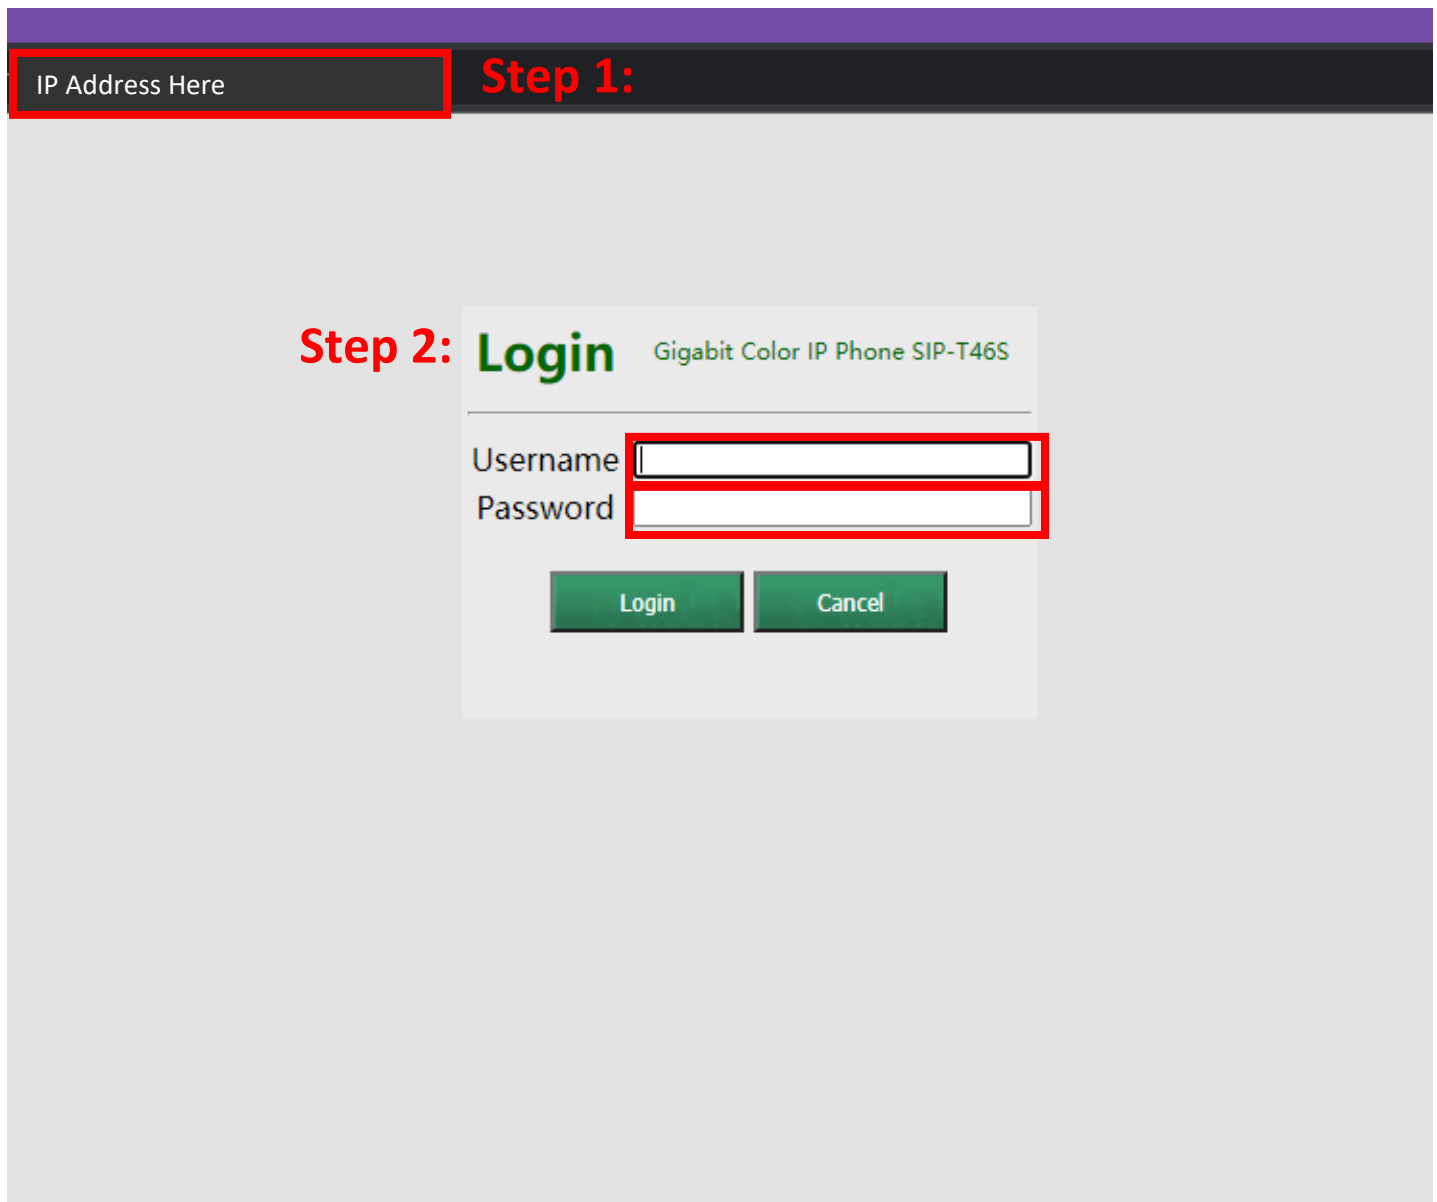


**Step 1:** Type your Phones IP Address into the search bar on a web browser

**Step 2:** Input Username: **admin** and Password: (Should be **7627**)

A screenshot of a web browser showing the login page for a Ringgenius device. At the top, there is a purple header bar. Below it, a dark grey bar contains the text "IP Address Here" on the left and "Step 1:" on the right. The main content area is light grey. In the center, there is a white login box titled "Step 2: Login" with the subtitle "Gigabit Color IP Phone SIP-T46S". Inside this box, there are two input fields: "Username" and "Password". Both fields are highlighted with a red rectangular border. Below the input fields are two green buttons: "Login" and "Cancel".

### Step 3: Select the DssKey tab

**Step 3:**

Yealink T46S

Log Out English (English)

Status Account Network **Dsskey** Features Settings Directory Security

Status

Wi-Fi Status

**Version** ?

|                  |                  |
|------------------|------------------|
| Firmware Version | 66.84.0.15       |
| Hardware Version | 66.0.0.128.0.0.0 |

**Device Certificate** ?

|                    |                   |
|--------------------|-------------------|
| Device Certificate | Factory Installed |
|--------------------|-------------------|

**Network** ?

|               |      |
|---------------|------|
| Internet Port | IPv4 |
|---------------|------|

**IPv4** ?

|                |               |
|----------------|---------------|
| WAN Port Type  | DHCP          |
| WAN IP Address | 10.1.10.204   |
| Subnet Mask    | 255.255.255.0 |
| Gateway        | 10.1.10.1     |
| Primary DNS    | 75.75.75.75   |
| Secondary DNS  | 75.75.76.76   |

**Network Common** ?

|                 |                        |
|-----------------|------------------------|
| MAC Address     | 80:5E:C0:91:3B:B6      |
| Wi-Fi MAC       | N/A                    |
| VLAN ID         | 0                      |
| Bluetooth MAC   | N/A                    |
| WAN Port Status | 1000Mbps Full Duplex   |
| PC Port Status  | 1000Mbps Full Duplex   |
| Device Type     | Bridge                 |
| Uptime          | 45 days 21:37          |
| Current Time    | 11:30:04 AM Tue Dec 14 |

**Account Status** ?

|           |   |
|-----------|---|
| Account 1 | 101@271950.core1-mia.ringlogix.com : Registered |
| Account 2 | 110@271950.core1-mia.ringlogix.com : Registered |
| Account 3 | Disabled  |
| Account 4 | Disabled  |

**NOTE**

**Version**  
It shows the firmware version and hardware version.

**Network**  
It shows the network settings of Internet (WAN) port.

**Account**  
It shows the registration status of SIP accounts.

Click here to get more product documents.

## Step 4: Click the drop down and select **BLF**

**Yealink** T46S
 

Step 4:

Log Out

English (English)

Status

Account

Network

Dsskey

Features

Settings

Directory

Security

Line Key1-9  
 Line Key10-18  
 Line Key19-27  
 Programable Key  
 Ext Key

Enable Page Tips Disabled
 Label Length Default

| Key       | Type         | Value   | Label | Line  | Extension |
|-----------|--------------|---------|-------|-------|-----------|
| Line Key1 | Line         | Default | 101   | Line1 |           |
| Line Key2 | Line         | Default |       | Line2 |           |
| Line Key3 | N/A          | Default |       | Line3 |           |
| Line Key4 | Line         | Default |       | Line4 |           |
| Line Key5 | BLF          | Default |       | Line5 |           |
| Line Key6 | Voice Mail   | Default |       | Line2 |           |
| Line Key7 | Pickup       | Default |       | Line7 |           |
| Line Key8 | Group Pickup |         |       |       |           |
| Line Key9 | Call Park    |         |       |       |           |
|           | Intercom     |         |       |       |           |
|           | DTMF         |         |       |       |           |
|           | Prefix       |         |       | N/A   |           |
|           | Local Group  |         |       | N/A   |           |
|           | XML Group    |         |       |       |           |
|           | XML Browser  |         |       |       |           |
|           | Conference   |         |       |       |           |
|           | Forward      |         |       |       |           |
|           | Transfer     |         |       |       |           |
|           | Hold         |         |       |       |           |
|           | DND          |         |       |       |           |

Confirm

Cancel

NOTE

**Key Type**  
 The free function key 'Types' Speed Dial, Key Event, Intercom.

**Key Event**  
 Key events are predefined shortcuts to phone and call functions.

**Intercom**  
 Enable the 'Intercom' mode and it is useful in an office environment as a quick access to connect to the operator or the secretary.


Click here to get more product documents.

Copyright © 1998-2021 \*\*Inc. All Rights Reserved

**Step 5:** Type the **Extension Number**

**Step 6:** **Label** the extension as you see fit

**Step 7:** Click **Confirm**

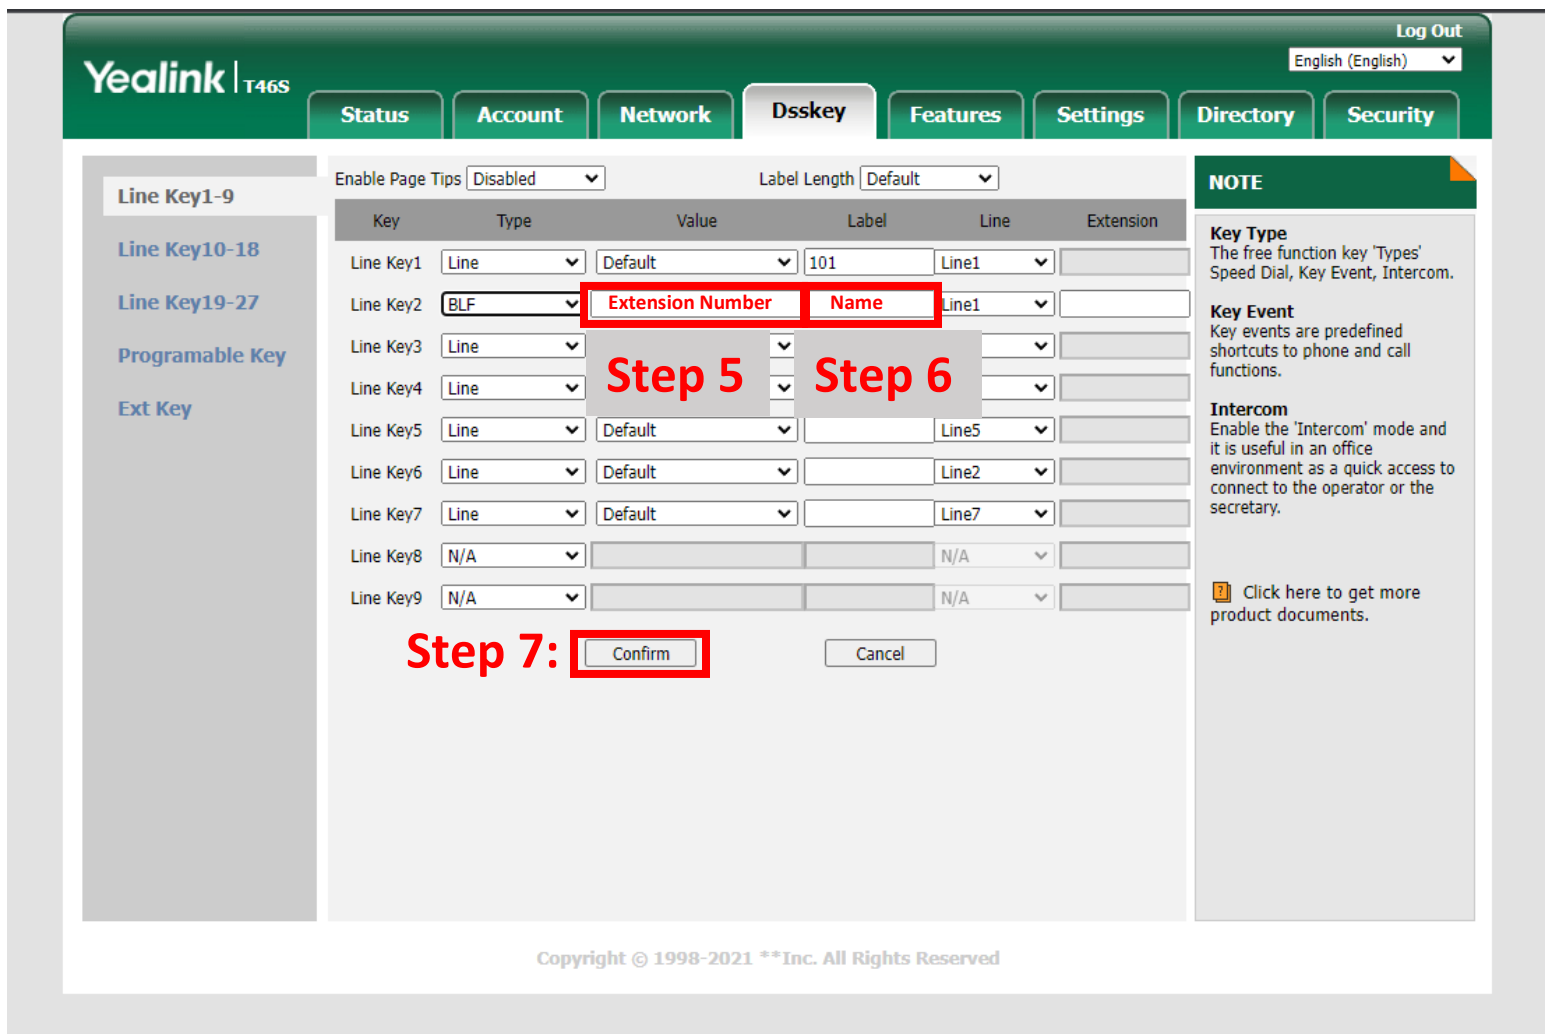

**Yealink | T46S** Log Out English (English)

**Status** **Account** **Network** **Dsskey** **Features** **Settings** **Directory** **Security**

Enable Page Tips Disabled Label Length Default

| Key       | Type | Value                   | Label       | Line  | Extension |
|-----------|------|-------------------------|-------------|-------|-----------|
| Line Key1 | Line | Default                 | 101         | Line1 |           |
| Line Key2 | BLF  | <b>Extension Number</b> | <b>Name</b> | Line1 |           |
| Line Key3 | Line |                         |             |       |           |
| Line Key4 | Line |                         |             |       |           |
| Line Key5 | Line | Default                 |             | Line5 |           |
| Line Key6 | Line | Default                 |             | Line2 |           |
| Line Key7 | Line | Default                 |             | Line7 |           |
| Line Key8 | N/A  |                         |             | N/A   |           |
| Line Key9 | N/A  |                         |             | N/A   |           |

**Step 5** **Step 6**

**Step 7:** **Confirm** Cancel

**NOTE**

**Key Type**  
The free function key 'Types' Speed Dial, Key Event, Intercom.

**Key Event**  
Key events are predefined shortcuts to phone and call functions.

**Intercom**  
Enable the 'Intercom' mode and it is useful in an office environment as a quick access to connect to the operator or the secretary.

[Click here to get more product documents.](#)

Copyright © 1998-2021 \*\*Inc. All Rights Reserved